



DRUMTEC

INTERNALLY FED ROTARY DRUM SCREEN

The Easy Driven Drum Screen



Fine perforated
plate



Internally fed



Minimal
maintenance



Call Us Today
1-855-650-2214



Email Us
info@aqualitec.com




Aqualitec Corp. - 3415 S. Sepulveda Blvd,
Suite 1100, Los Angeles, CA 90034

OPERATING MODE

Drumtec is an internally fed rotary drum screen that operates by dividing wastewater evenly with a deflector as it flows into the drum. The flow then passes through a perforated plate, which screens solids from the water.

Waste materials are transported by a large flight auger to the end of the drum, where they are emptied into either a built-in washer/compactor or directly into a dumpster.

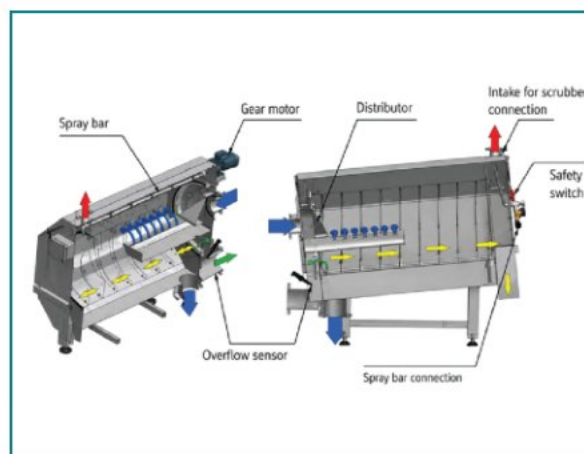

FEATURES & BENEFITS




Simply Driven

It consists of a pinion-and-rack system that is driven by a gear motor, causing the drum to rotate. This mechanism is constructed of HDPE (High Density Polyethylene) and does not require any maintenance.

High Capture Rate

Drumtec effectively captures a wide variety of debris, including rocks, grits, organics, wipes, rags, fibers, and other materials. The perforated plate used in the system has a high capture rate, with the ability to screen materials as small as 800 microns. This makes Drumtec an excellent solution for fine screening, particularly when used in conjunction with a MBR system.

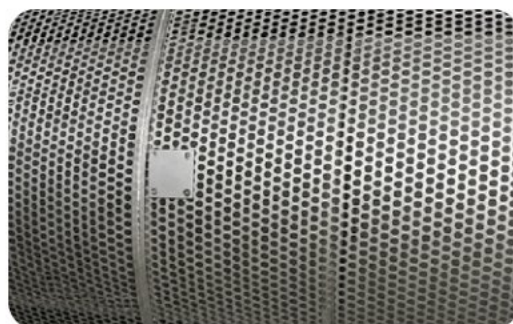




Easy & Safe Access

Each side of the drum cover is equipped with a lift handle for easy opening. To assist with this process, a hydraulic mechanism is in place, allowing a single operator to safely open the cover.

Minimal Maintenance

Weekly maintenance of the system is minimal and only consists of visually inspecting the drum and the spray bar nozzles. If necessary, the nozzles can be easily removed for cleaning or replacement.



Integrated Bypass

An integrated bypass can be provided. A sensor will stop the drum and the overflow will go to a tank containing a manual rack.

All-in One Equipment

For a complete treatment of the screenings, a washer compactor can be integrated directly at the discharge chute of the drum screen.



PERFORMANCES

DESIGN FLOW

Up to 10mgd

DRY SOLID CONCENTRATION

30%

VOLUME REDUCTION

Greater then 50%

DESIGN GUIDELINES

Drumtec is customized based on specifications and/or structural constraints. Below are some guidelines of the design requirements.

MATERIALS

304 or 316 Stainless Steel

Perforated plate from 1mm (1/32")

Wedge wire from 250 to 750 microns

SPACE REQUIREMENTS - FOOTPRINT

Drum Length : 3' to 10'

Drum diameter : 2.6' to 5'

MOTOR CHARACTERISTICS

Absorbed power : from $\frac{3}{4}$ hp (0.56KW)

Voltage : Custom to site - 3 phases

Frequency : 60 Hz



Drumtec & Compactec Woodland, WA

